

FORM PTO-1300
(REV 12-29-99)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

566.39819X00 Filed 03/05/01

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/786459

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED


PCT/JP99/07174

21 December 1999 (21.12.99)

21 December 1998 (21.12.98)

TITLE OF INVENTION METHOD FOR CONTROLLING TRANSMIT POWER IN A COMMUNICATION SYSTEM

APPLICANT(S) FOR DO/EO/US TSUNEHARA, KATSUHIKO; YANO, TAKAKASHI; UTA, TAKAKI; SUZUKI, TOSHIRO and SUZUKI, TOSHINORI



Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☒ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

International Publication No. WO00/38355-cover sheet

International Search Report w/cited Jap. Abstracts

Figs. 1-35

Credit Card Payment Form

U.S. APPLICATION NO. (if known, see 37 CFR 1.53)

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

566.39819x00

PCT/IP99/07174

- 17.
- ☒
- The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO \$970.00

International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but
international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$ 860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	18 - 20 =	0	X \$18.00
Independent claims	7 - 3 =	4	X \$78.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00

\$ 0.00
\$ 320.00
\$ 0.00

TOTAL OF ABOVE CALCULATIONS =

\$ 1,180.00

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

\$ 0.00

SUBTOTAL =

\$ 1,180.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$
+ 0.00

TOTAL NATIONAL FEE =

\$ 1,180.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 0.00

TOTAL FEES ENCLOSED =

\$ 1,180.00

Amount to be
refunded: \$
charged: \$

- a. ☒ payment
A check in the amount of \$ 1,180.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 01-2135. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

Carl I. Brundidge
Antonelli, Terry, Stout & Kraus, LLP
1300 North Seventeenth Street
Suite 1800
Arlington, VA 22209

SIGNATURE

Carl I. Brundidge

NAME

29,621

REGISTRATION NUMBER

Please type a plus sign (+) inside this box → ☐ +

528 Rec'd PCT/PTO 05 MAR 2001

Approved for use through 6/30/99. OMB 0651-0035
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

CHANGE OF CORRESPONDENCE ADDRESS *Application*

Address to:
Assistant Commissioner for Patents
Washington, D.C. 20231

Application Number

097786459

Filing Date

March 5, 2001

First Named Inventor

TSUNEHARA, et al

Group Art Unit

Examiner Name

Attorney Docket Number

566.39819X00

Please change the Correspondence Address for the above-identified application to:



Customer Number

020457

Type Customer Number here



020457

PATENT TRADEMARK OFFICE

OR

☐ Firm or
Individual Name

Address

Address

City

State

ZIP

Country

Telephone

Fax

This form cannot be used to change the data associated with a Customer Number. To change the data associated with an existing Customer Number use "Request for Customer Number Data Change" (PTO/SB/124).

I am the :



Applicant.



Assignee of record of the entire interest.
Certificate under 37 CFR 3.73(b) is enclosed.



Attorney or agent of record.

Typed or
Printed Name

Carl I. Brundidge

Registration NO. 29,621

Signature

Date

March 5, 2001

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

DESCRIPTION

METHOD FOR CONTROLLING TRANSMIT POWER IN A COMMUNICATION
SYSTEM

5

TECHNICAL FIELD

The present invention relates to a method for controlling transmit power in a mobile communication system, more particularly, a method for controlling transmit power in a mobile communication system to which a code division multiple access (CDMA) mode is applied.

BACKGROUND OF THE INVENTION

In the CDMA mode, a plurality of mobile stations share a same frequency band to communicate with a base station. Therefore, in the case of a communication between a mobile station A and a base station, for example, a signal from another mobile station B to the base station (an undesired signal) interferes a signal sent from the mobile station A to the base station (a desired signal) to obstruct a communication between the mobile station A and the base station. Similarly, the signal sent from the mobile station A obstructs a communication between the mobile station B and the base station.

The interference level increases relative to a receiving level of an undesired signal wave received by the

base station. The receiving level of the undesired signal is relative to the transmit power at the time the undesired signal is sent from a mobile station. Thus, it is necessary for the base station to control the transmit power from mobile stations so that the receiving level in the base station should be always minimum essential, in order to keep the interference level minimum. Under an ideal situation of this control, the number of channels available for communication becomes the largest, while the number of channels available for a communication would decrease as the situation goes away from the ideal.

Concerning a technology in controlling transmit power in a CDMA mobile communication, provided a transmit power controlling method described in *IMT-2000 Study Committee, Air-interface WG, SWG Document Title: Volume 3 Specifications of Air-Interface for 3G Mobile System, Source: SWG, Version: 0-4.0, Date: December 18, 1997* issued by DENPA SANGYOUKAI, for example (referred to as "W-CDMA mode", hereinafter). A transmit power controlling method in the W-CDMA mode will be described below. In the description, an upstream direction means a direction of sending signals from a mobile station to a base station and a downstream direction means a direction of sending signals from a base station to a mobile station.

A base station measures a signal to interference power ratio (SIR) of a signal sent from a mobile station in the

upstream direction to transmit a transmit power controlling signal in accordance with the measured SIR. A structural diagram of a conventional base station is shown in Figure 29. A signal received by an antenna 210 passes through a circulator 211 to take a process of modulating a base band signal and a process of receiving at a high/middle frequency in a radio module for receiving 212. The base station carries out processes of synchronous capturing and reverse spreading of the received signal in synchronous capturing/reverse spreading circuits 213a to 213n in which a parameter is set for each mobile station, since the received signal is a multiplex signal from a plurality of mobile stations (referred to as MSa to MSn). The signal output from the capturing/reverse spreading circuits 213a to 213n is input to detecting portions 214a to 214n, respectively, to take a detecting process such as compensation for a phase rotation. The signal output from the detecting portions 214a to 214n is input to demodulating portions 215a to 215n, respectively, to take an error controlling process such as de-interleave and Viterbi decoding, and then, are used as received data.

On the other hand, the signal output from the capturing/reverse spreading circuits 213a to 213n is input to an upstream channel SIR measuring portion 221 through signal lines 220a to 220n, respectively. The upstream channel SIR measuring portion 221 measures SIR of the

received signal input through the signal lines 220a to 220n,
respectively (referred to as SIRa to SIRn), to input the
SIRa to SIRn to an upstream channel transmit power
controlling signal generating portion 222 through the
5 signal lines 230a to 230n.

The upstream channel transmit power controlling
signal generating portion 222 compares SIRa to SIRn with
target SIRs given for MSa to MSn in advance by a controlling
portion 500 (referred to as T-SIRa to T-SIRn) to generate
10 transmit power controlling signals (TPCa to TPCn) for MSa
to MSn. The controlling portion 500 is an element that
controls a whole base station and that transmits various
signals to each element in the base station. In Figure 29,
signal lines are omitted other than the line to the upstream
15 channel transmit power controlling signal generating
portion 222 in order to simplify the diagram. A structure
of the controlling portion/the upstream channel transmit
power controlling signal generating portion 222 is shown
in Figure 30. The upstream channel transmit power
20 controlling signal generating portion 222 comprises
transmit power controlling signal generating portions 222a
to 222n whose inputs are SIRi and T-SIRi and whose outputs
are TPCi. The added character "i" denotes one of characters
"a" to "n". A structure of a transmit power controlling
25 signal generating portion 222i is shown in Figure 31. A
comparator 223i compares SIRi and T-SIRi input through a

signal line 230i to generate a signal that selects 0 in a selector 224i in the case of $SIRi \geq T-SIRi$, and a signal that selects 1 in the selector 224i in the case of $SIRi < T-SIRi$. The selector 224i selects either 0 or 1 in accordance with an output from the comparator 223i to output it as $TPCi$ through a signal line 231i. The $TPCi = 0$ is a signal that instructs a mobile station to reduce the transmit power. On the contrary, $TPCi = 1$ is a signal that instructs a mobile station to increase the transmit power.

Frame forming portions 225a to 225n shown in Figure 29 form transmission data to MSa to MSn , the data which took an error controlling process such as fold-encoding and interleave in encoding portions 222a to 222n, and the transmit power controlling signals $TPCa$ to $TPCn$, which are input from the upstream channel transmit power controlling signal generating portion 222, into frames in accordance with a format defined in the system. Spreading circuits 223a to 223n carry out a spectrum spreading process for outputs from the frame forming portions with a parameter corresponding to MSa to MSn . An adding circuit 226 adds transmission signals in order to multiplex signals for MSa to MSn . The transmission signals output from the adding circuit 226 are transmitted from the antenna 210 after passing through a radio module for transmission 224 and a circulator 211.

A mobile station MSi receives the aforementioned

transmit power controlling signal TPCi to change the transmit power in accordance with a result of demodulation. A structure of a conventional mobile station is shown in Figure 32. A signal received by the antenna 10 passes

5 through a circulator 11 to take a process of demodulating a base band signal and a process of receiving at a high/middle frequency in a radio module for receiving 12.

A mobile station carries out processes of synchronous capturing and spectrum reverse spreading of the received

10 signal in a synchronous capturing/reverse spreading circuit 13 in which a parameter is set for a channel being used in the mobile station, since the received signal is a multiplex signal in a plurality of channels. The signal output from the synchronous capturing/reverse spreading circuit 13

15 takes a detecting process such as compensation for a phase rotation in a detecting portion 14 and takes an error controlling process such as de-interleave and Viterbi decoding in demodulating portion 15, so as to be used as received data.

20 After output from the detecting portion 14, the received transmit power controlling signal passes through a signal line 16 and is input to a transmit power controlling signal determining portion 40. The transmit power controlling signal determining portion 40 determines

25 whether the received transmit power controlling signal is "0" or "1". The transmit power controlling signal

00706459.001001

11-1000

determining portion 40 generates a controlling signal, which selects "-1dB", for example, as an output for a selector 41 when the result of determining the transmit power controlling signal is "0", and generates a controlling signal, which selects "+1dB", for example, as an output for the selector 41 when the result of determining is "1", to send the controlling signal to the selector 41.

The selector 41 outputs either "+1dB" or "-1dB", for example, as a variation amount of the transmit power in accordance with a controlling signal input from the transmit power controlling signal determining portion 40.

COPIES: 001001

A transmit power calculating portion 19 determines the changed transmit power, using the variation amount of the transmit power input from the selector 41 and the current transmit power input from a transmit power maintaining circuit 20. That is, the changed transmit power is increased by 1dB from the current transmit power when the selector inputs "+1dB", and it is decreased by 1dB from the current transmit power when the selector contrary inputs "-1dB".

The transmission signal takes an error controlling process such as, for example, fold-encoding and interleave, in the encoding portion 22 to form a frame of a format defined in the system in a frame forming portion 25, and then, takes a spectrum spreading process in a spreading circuit 23. A variable gain amplifier 21 amplifies transmission signals

at a proper gain so that the signals could be transmitted at the designated transmit power from the transmit power calculating portion 19. The transmission signal output from the variable gain amplifier 21 passes through the radio module for transmission 24 and the circulator 11, and then, is transmitted from the antenna 10.

An example of a change of the transmit power of a mobile station in the case that the mobile station performs the above operation is shown as a solid line 62 in Figure 33. The horizontal axis 60 shows the time, while the vertical axis 61 shows the transmit power of the mobile station. Results 83a to 83e of determining the transmit power controlling signal received at the times 120 to 124 are also shown in the horizontal axis 60. As shown in Figure 33, the mobile station operates so as to increase the transmit power by 1dB at the times 122 and 124 when the result of determining the controlling signal is "1" and so as to decrease the transmit power by 1dB at the times 120, 121 and 123 when the result of determining the controlling signal is "0".

There are two problems solved by the invention as described below.

First, there is a large possibility that the received transmit power controlling signal would result in being demodulated with an error, when the quality of receiving the transmit power controlling signal in a mobile station

is bad. In this case, the conventional method that the demodulated result is determined either "0" or "1" increases the possibility that the transmit power controlling signal is incorrectly determined to be a value different from the proper value.

In the case that the transmit power controlling signal, which should be determined to be "1", is incorrectly determined to be "0", namely, in the case that a mobile station incorrectly decreases the transmit power at the time when the transmit power should be increased, the quality of a signal received from the above mobile station would deteriorate in the base station. This causes the quality of a communication to be deteriorated, and furthermore, causes a communication to be cut off.

To the contrary, in the case that the transmit power controlling signal, which should be determined to be "0", is incorrectly determined to be "1", namely, in the case that a mobile station incorrectly increases the transmit power at the time when the transmit power should be decreased, the interference amount by the above mobile station to another mobile station would increase in the base station. Therefore, deterioration of the communication quality and cut-off of a communication occur in the other mobile station. This means, at the same time, that the number of mobile stations available for a communication would decrease, and as a result, the communication capacity of the whole system

0076459.001001

will be reduced.

Moreover, the aforementioned deterioration of the communication quality and reduction of the communication capacity of the system appear more significantly, when the result of determining the transmit power controlling signal, whose receiving quality is bad, is biased to either "0" or "1" due to such as a component of direct current offset contained in a receiver in a mobile station.

Secondly, when a receiving operation stops earlier than a transmitting operation as a controlling sequence in the base station upon cutting off a communication, that is, an operation of the synchronous capturing/reverse spreading circuit 213i ($i = 1, 2, \dots, n$) stops earlier than that of the upstream channel SIR measuring portion 221 in Figure 29, it is considered that the operation of the upstream channel SIR measuring portion 221 would become unstable, since the upstream channel SIR measuring portion 221 tries to get SIR_i from the output of the synchronous capturing/reverse spreading circuit 213i whose operation has stopped. In this case, an improper transmit power controlling signal TPC_i is generated to be transmitted from the base station to the mobile station MS_i . The mobile station MS_i may perform transmission with an excessive transmit power, as a result of controlling the transmit power in accordance with the above-mentioned improper transmit power controlling signal TPC_i . In this case, the

interference amount by a signal of the mobile station MSI
to another mobile station increases in the base station.
Thus, the deterioration of the communication quality and
cut-off of a communication occur in the other mobile station.
5 This reduces the communication capacity of the whole system,
like the first problem.

DISCLOSURE OF THE INVENTION

In order to solve the first problem, a structure
according to the present invention is arranged so that a
10 radio base station transmits a transmit power controlling
signal for controlling transmit power of a mobile station,
and that said mobile station calculates a likelihood of said
transmit power controlling signal on the basis of the
received transmit power controlling signal and the
15 receiving quality to calculate a variation amount of the
transmit power on the basis of said likelihood, so that the
transmit power of the mobile station would be controlled
on the basis of the variation amount.

Further, in order to solve the first problem, the
20 invention is characterized in that said likelihood is
calculated by further adding a perch receiving quality of
a signal transmitted by said radio base station; that the
perch receiving quality of a signal transmitted by said
radio base station is compared with the receiving quality
25 of a transmit power controlling signal so that it is
determined that a call is cut off in a channel being received

when only the receiving quality of the channel being received is deteriorated and it is determined that a receiving condition is no longer proper due to a mobile station being in shade or the like when the both of the
5 receiving qualities are deteriorated at the same time; and that the likelihood is calculated on the basis of a result of the determination.

In order to solve the first problem, the invention is also characterized in that, when an absolute value of the
10 likelihood of said transmit power controlling signal is large, an upper limit value and a lower limit value of the transmit power of a mobile station are updated and maintained so that the transmit power of said mobile station is limited between said upper limit value and said lower
15 limit value.

In order to solve the first problem, the invention is also characterized in that an average value of the transmit power of a mobile station is calculated, and that the transmit power of said mobile station is switched on the
20 basis of the size of said likelihood so as to be said calculated average transmit power of the mobile station or transmit power of the mobile station that is calculated on the basis of said likelihood.

In order to solve the first problem, the invention is
25 characterized in that open loop transmit power is calculated on the basis of the receiving quality or the receiving power

of another channel different from a channel being used, and that the transmit power of said mobile station is switched on the basis of the size of said likelihood so as to be said calculated open loop transmit power or transmit power of the mobile station that is calculated on the basis of said likelihood.

In order to solve the first problem, the invention is characterized in that said transmit power controlling signal is a signal comprising two values, and that said likelihood is calculated so that an absolute value of the likelihood would be large when the receiving quality is good and so that an absolute value of the likelihood would be small when the receiving quality is bad.

In order to solve the first problem, the invention is characterized in that the transmit power is increased when said likelihood is a first reference value or more, that the transmit power is maintained when said likelihood is less than said first reference value and the second reference value or more, and that the transmit power is decreased when said likelihood is less than said second reference value.

In order to solve the first problem, the invention is characterized in that the transmit power is increased when said likelihood is said first reference value or more, that the transmit power is toggle-controlled when said likelihood is less than said first reference value and said

second reference value or more, and that the transmit power is decreased when said likelihood is less than said second reference value.

In order to solve the first problem, the invention is characterized in that the transmit power is increased when said likelihood is said first reference value or more, that a variation amount of the transmit power is made to be the power corresponding to said likelihood when said likelihood is less than said first reference value and said second reference value or more, and that the transmit power is decreased when said likelihood is less than said second reference value.

In order to solve the first problem, a mobile station according to the invention comprises: receiving means for receiving transmit power controlling information transmitted by a radio base station; measuring means for measuring the receiving quality of a wave transmitted by said radio base station; likelihood generating means for generating a likelihood of said transmit power controlling information on the basis of the transmit power controlling information received by said receiving means and the receiving quality measured by said measuring means; variation amount generating means for generating a variation amount of the transmit power on the basis of the likelihood generated by said likelihood generating means; and controlling means for controlling the transmit power

of a mobile station on the basis of the variation amount generated by said variation amount generating means.

In order to solve the first problem, a mobile station according to the invention further comprises perch
5 receiving quality measuring means for measuring the receiving quality of a perch signal transmitted by said radio base station, wherein said likelihood generating means generates a likelihood with the receiving quality measured by said perch receiving quality measuring means
10 taken into a consideration.

In order to solve the first problem, in a communication system according to the invention, a radio base station comprises: transmit power controlling information generating means for generating transmit power controlling
15 information for controlling the transmit power of a mobile station; and transmitting means for transmitting the transmit power controlling information generated by said transmit power controlling information generating means, and a mobile station comprises: receiving means for
20 receiving the transmit power controlling information transmitted by said transmit means; measuring means for measuring the receiving quality of a wave transmitted by said radio base station; likelihood generating means for generating a likelihood of said transmit power controlling
25 information on the basis of the transmit power controlling information received by said receiving means and the

receiving quality measured by said measuring means;
variation amount generating means for generating a
variation amount of the transmit power on the basis of the
likelihood generated by said likelihood generating means;
5 and controlling means for controlling the transmit power
of a mobile station on the basis of the variation amount
generated by said variation amount generating means.

In order to solve the second problem, the invention
is characterized in that a radio base station measures SIR
10 for every said mobile station to compare each of said
measured SIRs with a target SIR given in advance, generates
a transmit power controlling signal for decreasing the
transmit power when said SIR is the target SIR or more or
when said radio base station has stopped a receiving
15 operation for said mobile station, generates a transmit
power controlling signal for increasing the transmit power
when said SIR is less than the target SIR, and transmits
said generated transmit power controlling signal to the
mobile station.

In order to solve the second problem, the invention
is characterized by a radio base station controlling
transmit power of a mobile station comprising: signal
quality measuring means for measuring signal quality of said
mobile station; comparing means for comparing the signal
25 quality measured by said signal quality measuring means with
a predetermined value; generating means for generating, as

a result of comparison in said comparing means, transmit power controlling information for decreasing said transmit power when said signal quality is said predetermined value or more and for generating transmit power controlling information for increasing said transmit power when said signal quality is less than said predetermined value; and transmitting means for transmitting to said mobile station the transmit power controlling signal generated by said generating means. The above signal quality is SIR or the like.

In order to solve the second problem, according to the invention, a radio base station controlling transmit power of a mobile station comprises: receiving means for receiving a channel transmitted by said mobile station; controlling means for controlling a receiving operation of said receiving means; generating means for generating instructing information for giving an instruction to decrease the transmit power of said mobile station at the time when said controlling means stops the receiving operation of said receiving means; and transmitting means for transmitting to said mobile station the instructing information generated by said generating means.

In order to solve the second problem, according to the invention, a radio base station controlling transmit power of a mobile station comprises: receiving means for receiving a channel transmitted by said mobile station; controlling

means for controlling a receiving operation of said receiving means; generating means for generating instructing information for giving an instruction to decrease the transmit power of said mobile station when said
 5 controlling means tries to stop the receiving operation of said receiving means; and transmitting means for transmitting to said mobile station the instructing information generated by said generating means before said receiving operation is stopped.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a structure of a mobile station according to the invention.

15

Figure 2 shows a structure of a transmit power controlling signal likelihood calculating portion according to the invention.

Figure 3 shows a likelihood calculating method according to the invention.

20

Figure 4 shows a structure of a transmit power variation amount calculating portion according to the invention.

Figure 5 shows an example of an operation of a likelihood determining portion according to the invention.

Figure 6 shows an example of a change of transmit power of a mobile station according to the invention.

25

Figure 7 shows a structure of a transmit power variation amount calculating portion according to the

00705150.001001

invention.

Figure 8 illustrates an operation of a toggle portion according to the invention.

Figure 9 illustrates an operation of a likelihood
5 determining portion according to the invention.

Figure 10 shows an example of a change of transmit power of a mobile station according to the invention.

Figure 11 shows a structure of a transmit power variation amount calculating portion according to the
10 invention.

Figure 12 illustrates an operation of a transmit power variation amount calculating portion according to the invention.

Figure 13 shows an example of a change of transmit
15 power of a mobile station according to the invention.

Figure 14 shows a structure of a mobile station according to the invention.

Figure 15 shows a structure of a transmit power variation amount calculating portion according to the
20 invention.

Figure 16 illustrates an operation of a likelihood determining portion according to the invention.

Figure 17 shows a structure of a transmit power controlling portion according to the invention.

Figure 18 shows a structure of a transmit power limit value calculating portion according to the invention.
25

Figure 19 shows an example of a change of transmit power according to the invention.

Figure 20 shows a structure of a mobile station according to the invention.

5 Figure 21 shows a structure of a transmit power selecting portion according to the invention.

Figure 22 illustrates an operation of a likelihood determining portion according to the invention.

10 Figure 23 shows a structure of a transmit power selecting portion according to the invention.

Figure 24 shows a structure of a likelihood selecting portion according to the invention.

Figure 25 shows a structure of a base station according to the invention.

15 Figure 26 shows a structure of an upstream channel transmit power controlling signal generating portion according to the invention.

20 Figure 27 shows a structure of the transmit power controlling signal generating portion according to the invention.

Figure 28 illustrates an operation of a selector 235i according to the invention.

Figure 29 shows a structure of a conventional base station.

25 Figure 30 shows a structure of an upstream channel transmit power controlling signal generating portion

0706159.001001

according to the invention.

Figure 31 shows a structure of a conventional transmit power controlling signal generating portion.

Figure 32 shows a structure of a conventional mobile station.

Figure 33 shows a conventional varying state of transmit power.

Figure 34 shows a structure of a receiving quality calculating portion using perch receiving quality.

Figure 35 shows a communication system to which the present invention is applied.

BEST MODE FOR CARRYING OUT THE INVENTION

Figure 35 shows a communication system according to the present invention. The communication system according to the invention includes a base station 3500 and mobile stations 3501 to 3503. The mobile station 3501 is located close to the base station 3500 with its line state stable, so that an error of power controlling bit would be few and power controlling would not be out of control. The mobile station 3502, however, has an obstacle 3504 such as a building on the way to the base station 3500, although it is located close to the base station. Therefore, the obstacle 3504 greatly attenuates the wave from the base station 3500, which may cause an error of the power controlling bit and the power control to be out of control. Further, the mobile station 3503 is located far away from

the base station 3500, so that attenuation or interference of the wave may cause an error of the power controlling bit and the power control to be out of control. The invention provides a much more stable communication system, in which the power control itself would not be out of control even when a mobile station is in a condition that an error of the power controlling bit easily occurs.

Figure 1 shows a structure of a mobile station of a first embodiment. Elements corresponding to those of a conventional mobile station shown in Figure 32 are marked with the same reference number.

A received signal is processed in an antenna 10, a circulator 11, a radio module for receiving 12, a synchronous capturing/reverse spreading circuit 13 and a detecting portion 14, respectively, before being input to a transmit power controlling signal likelihood calculating portion 30 via a signal line 16.

The transmit power controlling signal likelihood calculating portion 30 calculates likelihood of a transmit power controlling signal on the basis of the receiving quality of the received transmit power controlling signal and a determined result of "0" or "1". A structure of the transmit power controlling signal likelihood calculating portion 30 is shown in Figure 2. A transmit power controlling signal 0/1 determining portion 40 determines whether the received transmit power controlling signal is

"0" or "1".

A receiving quality calculating portion 50 calculates the receiving quality of the received transmit power controlling signal to output it to a likelihood calculating portion 51. Basically, the receiving power, SIR, or the like, which is measured on the instant upon receiving the transmit power controlling signal, should be used as receiving quality calculated by the receiving quality calculating portion 50. On the other hand, a long time integral operation is required to accurately observe the receiving power or the SIR. In the case that the above-mentioned receiving power or the SIR integrated for a long time (referred to as a long time integral value, hereinafter) is used for transmit power controlling, which is required to be performed at high speed, it is considered that the controlling delay would be increased, so that the transmit power cannot properly controlled. Therefore, the receiving quality calculating portion 50 calculates the receiving quality of the transmit power controlling signal, using the above transmit power controlling signal and the result of integrating the receiving power or the SIR of a signal received at the time close to receiving the above transmit power controlling signal (referred to as a short time integral value, hereinafter).

Using the short time integral value may cause an incorrect calculation of the receiving quality when the

short time integral value is used for calculating the receiving quality as it is, since an error of the short time integral value is considered to be large. Therefore, the receiving power calculating portion 50 may compare the long
5 time integral value with the short time integral value, for example, so as to output the bad receiving quality when the difference of the both values is large.

The receiving quality calculating portion 50 also may perform the following operation in order to estimate that
10 a receiving condition of a channel being received is no longer proper due to cutting off a call or being in shade. A mobile station measures the receiving power or SIR of a channel, which is always transmitted from the base station like a perch channel in the W-CDMA mode, for example, and
15 whose transmit power is known (referred to as perch receiving quality, hereinafter). A structure of the receiving quality calculating portion in this case is shown in Figure 34. A perch receiving quality measuring portion 300 measures the above perch receiving quality. A comparing
20 portion 301 compares the above-mentioned short time integral value and the perch receiving quality obtained by the perch receiving quality measuring portion 300. A receiving quality determining portion 302 determines, in accordance with a comparing result at the comparing portion
25 301, that a call has been cut off in the channel being received when only the receiving quality of the channel

being received is deteriorated, and that the receiving condition is no longer proper due to such a situation that a mobile station is in shade when the both is deteriorated at the same time, and then, outputs a bad receiving quality.

5 The likelihood calculating portion 51 calculates the likelihood of the above transmit power controlling signal on the basis of the result of determining in the transmit power controlling signal 0/1 determining portion 40 and the result of calculating in the receiving quality calculating
10 portion 50. An example of a relation between the likelihood and the results of determining in the transmit power controlling signal 0/1 determining portion 40 and of calculating in the receiving quality calculating portion 50 is shown by a bent line 150 in Figure 3. The result of
15 calculating the likelihood shown in Figure 3 will be described below. It is defined that the likelihood is a positive value when the result of determining the transmit power controlling signal is 1. On the other hand, it is defined that the likelihood is a negative value when the
20 result of determining is 0. Further, it is defined that an absolute value of the likelihood is large when the receiving quality is good, while the absolute value of the likelihood is small when the receiving quality is bad.

25 The likelihood of the transmit power controlling signal calculated in the above method is input to a transmit power variation amount calculating portion 31 in Figure 1.

09786459.091001

09766459-091004
700769-5192260

The transmit power variation amount calculating portion 31 calculates the variation amount of the transmit power on the basis of the likelihood of the input transmit power controlling signal. A structure of the transmit power variation amount calculating portion 31 in the first embodiment is shown in Figure 4. A likelihood determining portion 70 generates a controlling signal for selecting either "+ 1dB (increase)", "- 1dB (decrease)" or "0dB (no change)", for example, as the variation amount of the transmit power on the basis of the likelihood of the transmit power controlling signal input from the transmit power controlling signal likelihood calculating portion 30 to output the generated signal to a selector 71. An example of an operation of the likelihood determining portion 70 in the first embodiment is shown in Figure 5. The likelihood determining portion 70 outputs to the selector 71 a controlling signal such that "+ 1dB" is selected in the selector 71, when the likelihood of the transmit power controlling signal to be input exists within an area 100, which is $\alpha+$ or more. Similarly, the likelihood determining portion 70 outputs to the selector 71 a controlling signal such that "0dB" is selected, when the likelihood of the transmit power controlling signal to be input exists within an area 101, which is $\alpha-$ or more and less than $\alpha+$, and the likelihood determining portion 70 outputs a controlling signal such that "- 1dB" is selected, when the likelihood

of the transmit power controlling signal to be input exists within an area 102, which is less than α -. The selector 71 selects the transmit power variation amount in accordance with the controlling signal from the likelihood determining portion 70 to output the variation amount to the transmit power calculating portion 19 shown in Figure 1.

The transmit power calculating portion 19 shown in Figure 1 calculates the transmit power, as same as the case of the conventional mobile station, on the basis of the variation amount of the transmit power input from the transmit power variation amount calculating portion 31 and of the current transmit power input from the transmit power maintaining circuit 20. The transmission signal processed in the encoding portion 22 and the spreading circuit 23 is amplified so as to be transmitted at the aforementioned transmit power in the variable gain amplifier 21, and then, passes through the radio module for transmission 24 and the circulator 11 to be transmitted from the antenna 10.

An example of a change of transmit power of a mobile station in the case that the mobile station performs an operation in the first embodiment is shown as a solid line 63 in Figure 6. As shown in Figure 6, the mobile station operates so that the variation amount of the transmit power would be 0dB, that is, the transmit power would not be changed, for a time 103 in which the likelihood of the transmit power controlling signal is α - or more and less than α +

Next, an operation of a mobile station of the second embodiment will be described. A structure of the mobile station in the second embodiment is shown in Figure 1 as same as that in the first embodiment. In the second
5 embodiment, a structure of the transmit power variation amount calculating portion 31 is different from that of the first embodiment. The structure of the transmit power variation amount calculating portion 31 in the second
10 embodiment is shown in Figure 7. Elements corresponding to those of the transmit power variation amount calculating portion 31 in the first embodiment are marked with the same reference number.

The likelihood determining portion 70 generates a controlling signal for selecting either "+ 1dB (increase)",
15 "- 1dB (decrease)" or "toggle portion 72 (toggle operation)", for example, as a variation amount of the transmit power on the basis of the likelihood of the transmit power controlling signal input from the transmit power
controlling signal likelihood calculating portion 30 to
20 output the generated signal to the selector 71. An operation of the toggle portion 72 is shown in Figure 8.

The toggle portion 72 outputs "- 1dB" in the case of the input of "+ 1dB", and "+ 1dB" in the case of the input of "- 1dB". An example of an operation of the likelihood
25 determining portion 70 in the second embodiment is shown in Figure 9. The likelihood determining portion 70 outputs

to the selector 71 a controlling signal such that "+ 1dB" is selected in the selector 71, when the likelihood of the transmit power controlling signal to be input exists within an area 100, which is $\alpha+$ or more. Similarly, the likelihood
5 determining portion 70 outputs to the selector 71 a controlling signal such that "toggle portion 72" is selected, when the likelihood of the transmit power controlling signal to be input exists within an area 101, which is $\alpha-$ or more and less than $\alpha+$, and the likelihood determining portion
10 70 outputs a controlling signal such that "- 1dB" is selected, when the likelihood of the transmit power controlling signal to be input exists within an area 102, which is less than $\alpha-$.

The selector 71 selects the transmit power variation
15 amount in accordance with the controlling signal from the likelihood determining portion 70 to output the variation amount to the transmit power calculating portion 19 shown in Figure 1. The operation thereafter to the transmission of the transmission signal from the antenna 10 is same as
20 that of the first embodiment.

An example of a change of transmit power of a mobile station in the case that a mobile station performs an operation in the second embodiment is shown as a solid line
64 in Figure 10. As shown in Figure 10, the mobile station
25 operates so that the variation amount of the transmit power would repeat "+ 1dB" and "- 1dB" alternately, during a time

103 in which the likelihood of the transmit power controlling signal is α - or more and less than α +.

Next, an operation of a mobile station of the third embodiment will be described. A structure of the mobile station in the third embodiment is shown in Figure 1 as same as the first and second embodiments. In the third embodiment, a structure of the transmit power variation amount calculating portion 31 is different from that of the first and second embodiments. The structure of the transmit power variation amount calculating portion 31 in the third embodiment is shown in Figure 11. A likelihood-transmit power variation amount converting portion 73 converts the likelihood of the transmit power controlling signal input from the transmit power controlling signal likelihood calculating portion 30 into the transmit power variation amount. An example of an operation of the likelihood-transmit power variation amount converting portion 73 is shown as a line 74 in Figure 12. In Figure 12, the likelihood-transmit power variation amount converting portion 73 outputs "+ 1dB", for example, to the transmit power calculating portion 19 as a transmit power variation amount, when the likelihood of the transmit power controlling signal to be input is α + or more. Similarly, the likelihood-transmit power variation amount converting portion 73 outputs "- 1dB", for example, to the transmit power calculating portion 19 as a transmit power variation

amount, when the likelihood of the transmit power
controlling signal to be input is less than α -. The
likelihood-transmit power variation amount converting
portion 73 outputs a transmit power variation amount, which
varies as shown as the line 74 in Figure 12, for example,
to the transmit power calculating portion 19 in accordance
with the likelihood of the transmit power controlling signal.
The operation thereafter to the transmission of the
transmission signal from the antenna 10 is same as that of
the first embodiment.

An example of a change of transmit power of a mobile
station in the case that the mobile station performs an
operation in the third embodiment is shown as a solid line
65 in Figure 13. As shown in Figure 13, the mobile station
controls the transmit power so that the variation amount
of the transmit power would be a value smaller than "+ 1dB"
and "- 1dB" during the time 103 in which the likelihood of
the transmit power controlling signal is α - or more and less
than α +

A structure of the mobile station in the fourth
embodiment is shown in Figure 14. Elements corresponding
to a structure of the mobile stations shown in Figures 32
and 1 are marked with the same reference number. The
likelihood of the transmit power controlling signal
calculated in the transmit power controlling signal
likelihood calculating portion 30 is input to the transmit

power variation amount calculating portion 31, as same as in the first embodiment.

A structure of the transmit power variation amount calculating portion 31 in the fourth embodiment is shown in Figure 15. The likelihood determining portion 130 generates a controlling signal for selecting either "+ 1dB (increase)" or "- 1dB (decrease)", for example, as a variation amount of the transmit power on the basis of the likelihood of the transmit power controlling signal input from the transmit power controlling signal likelihood calculating portion 30 to output the generated signal to a selector 131. An example of an operation of the likelihood determining portion 130 in the fourth embodiment is shown in Figure 16. The likelihood determining portion 130 outputs to the selector 131 a controlling signal such that "+ 1dB" is selected in the selector 131, when the likelihood of the transmit power controlling signal to be input exists within an area of 0 or more. On the other hand, the likelihood determining portion 130 outputs to the selector 131 a controlling signal such that "- 1dB" is selected, when the likelihood of the transmit power controlling signal to be input exists within an area less than 0. The selector 131 selects the transmit power variation amount in accordance with the controlling signal from the likelihood determining portion 130 to output the variation amount to the transmit power calculating portion 19 shown in Figure

14. The transmit power calculating portion 19 calculates the transmit power of the mobile station as same as in the first embodiment.

5 The transmit power limiting portion 32 compares the transmit power calculated in the transmit power calculating portion 19 and the transmit power limit value calculated inside the transmit power limiting portion 32 to control the transmit power of the mobile station. A structure of the transmit power limiting portion 32 is shown in Figure

10 17. The transmit power input from the transmit power calculating portion 19 is input to a transmit power limit value calculating portion 90 and a comparing portion 91. An example of an operation of the transmit power limit value calculating portion 90 is shown in Figure 18. In the

15 transmit power limit value calculating portion 90, the likelihood of the transmit power controlling signal input from the transmit power controlling signal likelihood calculating portion 30 is first compared with thresholds β^- and β^+ . When the likelihood of the transmit power

20 controlling signal cannot establish a relation $\beta^- \leq (\text{likelihood}) < \beta^+$, that is, when the absolute value of the likelihood of the transmit power controlling signal is large, the upper limit value TXPU of the transmit power and the lower limit value TXPL of the transmit power are updated.

25 According to this operation, the upper and lower limit values of the transmit power of the mobile station are

calculated when the absolute value of the likelihood of the transmit power controlling signal is large, that is, when the receiving quality of the transmit power controlling signal is good, while the upper and lower limit values of the transmit power of the mobile station are maintained when the absolute value of the likelihood of the transmit power controlling signal is small, that is, when the receiving quality of the transmit power controlling signal is bad.

The comparing portion 91 shown in Figure 17 compares the transmit power input from the transmit power calculating portion 19 and the upper and lower limit values of the transmit power input from the transmit power limit value calculating portion 90. The comparing portion 91 changes the transmit power into TXPU to output it to the transmit power maintaining circuit 20 and the variable gain amplifier 21 shown in Figure 14, when the transmit power input from the transmit power calculating portion 19 is larger than the upper limit value TXPU of the transmit power input from the transmit power limit value calculating portion 90. On the other hand, the comparing portion 91 changes the transmit power into TXPL to output it to the transmit power maintaining circuit 20 and the variable gain amplifier 21 shown in Figure 14, when the transmit power input from the transmit power calculating portion 19 is smaller than the lower limit value TXPL of the transmit power input from the transmit power limit value calculating portion 90. Further,

the comparing portion 91 outputs the transmit power input from the transmit power calculating portion 19 to the transmit power maintaining circuit 20 and the variable gain amplifier 21 shown in Figure 14, as it is, when the transmit power input from the transmit power calculating portion 19 is between TXPU and TXPL. The operation thereafter to the transmission of the transmission signal from the antenna 10 is same as that of the first embodiment.

An example of a change of transmit power of a mobile station in the case that the mobile station performs an operation in the fourth embodiment is shown as a solid line 66 in Figure 19. As shown in Figure 19, the upper limit value TXPU and the lower limit value TXPL of the transmit power of the mobile station are maintained at a certain value during the time 103 in which the likelihood of the transmit power controlling signal is α - or more and less than α +. In the example shown in Figure 19, the transmit power of the mobile station is limited not so as to be less than the lower value TXPL of the transmit power during the time 103.

In the fourth embodiment, the transmit power variation amount calculating portion 31 may have a structure shown in the first to third embodiments.

A structure of a mobile station in the fifth embodiment is shown in Figure 20. Elements corresponding to a structure of the mobile stations shown in Figures 32 and 1 are marked with the same reference number. The likelihood

of the transmit power controlling signal calculated in the transmit power controlling signal likelihood calculating portion 30 is input to the transmit power variation amount calculating portion 31, as same as in the first embodiment.

- 5 The transmit power variation amount calculating portion 31 may have any structure and operation of the transmit power variation amount calculating portion 31 described in the first to fourth embodiments. The variation amount of the transmit power calculated in the transmit power variation
10 amount calculating portion 31 is input to the transmit power calculating portion 19.

The transmit power calculating portion 19 calculates the transmit power of the mobile station as same as in the first embodiment.

- 15 The transmit power calculated in the transmit power calculating portion 19 is input to a transmit power selecting portion 33. The transmit power selecting portion 33 selects the transmit power in accordance with the likelihood of the transmit power controlling signal input
20 from the transmit power controlling signal likelihood calculating portion 30.

- A structure of the transmit power selecting portion 33 in the fifth embodiment is shown in Figure 21. A likelihood determining portion 140 generates a controlling
25 signal for selecting as the transmit power either the transmit power input from the transmit power calculating

portion 19 or the transmit power input from a transmit power averaging portion 142 on the basis of the likelihood of the transmit power controlling signal input from the transmit power controlling signal likelihood calculating portion 30.

5 and outputs the generated signal to a selector 141. An example of an operation of the likelihood determining portion 140 in the fifth embodiment is shown in Figure 22. The likelihood determining portion 140 outputs to the selector 141 a controlling signal such that the transmit

10 power input from the transmit power calculating portion 19 is selected in the selector 141, when the likelihood of the transmit power controlling signal to be input exists within an area 104, which is γ_+ or more, or an area 106, which is less than γ_- , namely, when the receiving quality of the

15 received transmit power controlling signal is good. On the other hand, the likelihood determining portion 140 outputs to the selector 141 a controlling signal such that the transmit power input from the transmit power averaging portion 142 is selected, when the likelihood of the transmit

20 power controlling signal to be input exists within an area 105, which is γ_- or more and less than γ_+ , namely, when the receiving quality of the received transmit power controlling signal is bad. The selector 141 selects the transmit power in accordance with the controlling signal

25 from the likelihood determining portion 140 to output the transmit power to a transmit power maintaining circuit 20

and a variable gain amplifier 21 shown in Figure 20. The transmit power averaging portion 142 calculates an average value of the transmit power to be input so as to output the average value to the selector 141.

5 The operation thereafter to the transmission of the transmission signal from the antenna 10 is same as that of the first embodiment.

Next, an operation of a mobile station of the sixth embodiment will be described. A structure of the mobile station in the sixth embodiment is shown in Figure 20 as same as that in the fifth embodiment. In the sixth embodiment, a structure of the transmit power selecting portion 33 is different from that of the fifth embodiment. The structure of the transmit power selecting portion 33 in the sixth embodiment is shown in Figure 23. A likelihood determining portion 150 generates a controlling signal for selecting as the transmit power either the transmit power input from the transmit power calculating portion 19 or the transmit power input from an open loop transmit power calculating portion 152 on the basis of the likelihood of the transmit power controlling signal input from the transmit power controlling signal likelihood calculating portion 30, and outputs the generated signal to a selector 151. An example of an operation of the likelihood determining portion 150 in the sixth embodiment is shown in Figure 24. The likelihood determining portion 150

outputs to the selector 151 a controlling signal such that the transmit power input from the transmit power calculating portion 19 is selected in the selector 151, when the likelihood of the transmit power controlling signal to be input exists within an area 107, which is $\delta+$ or more, or an area 109, which is less than $\delta-$, namely, when the receiving quality of the received transmit power controlling signal is good.

On the other hand, the likelihood determining portion 150 outputs to the selector 151 a controlling signal such that the transmit power input from the open loop transmit power calculating portion 152 is selected, when the likelihood of the transmit power controlling signal to be input exists within an area 108, which is $\delta-$ or more and less than $\delta+$, namely, when the receiving quality of the received transmit power controlling signal is bad. The selector 151 selects the transmit power in accordance with the controlling signal from the likelihood determining portion 150 to output the transmit power to the transmit power maintaining circuit 20 and the variable gain amplifier 21 shown in Figure 20.

The open loop transmit power calculating portion 152 uses the receiving quality, the receiving power and the like of a channel different from the channel being used for a communication such as a perch channel in the W-CDMA mode, for example, so as to estimate the attenuation amount

between a mobile station and a base station, and calculates the transmit power of the mobile station, which meets the receiving quality required in the base station. The open loop transmit power calculating portion 152 outputs the
5 calculated transmit power to the selector 151.

The operation thereafter to the transmission of the transmission signal from the antenna 10 is same as that of the first embodiment.

A structure of a base station in the seventh embodiment
10 is shown in Figure 25. Elements corresponding to a structure of a conventional base station shown in Figure 29 are marked with the same reference number. A received signal is measured for SIR (SIRa to SIRn) per a mobile station (MSa to MSn) in the upstream channel SIR measuring portion
15 221 to be input through signal lines 230a to 230n into an upstream channel transmit power controlling signal generating portion 250 as same as in the conventional base station.

The upstream channel transmit power controlling
20 signal generating portion 250 generates a transmit power controlling signal for MSa to MSn (referred to as TPCa to TPCn) on the basis of a comparison result between SIRa to SIRn and a target SIR, which is given in advance from a controlling portion 501 for MSa to MSn (referred to as T-SIRa
25 to T-SIRn), and of RXa to RXn, which are a controlling signal showing whether a receiving operation is performed for a

signal transmitted from the MSa to MSn and which are input from the controlling portion 501. The controlling portion 501 is further provided with a function for supplying the upstream channel transmit power controlling signal generating portion 250 with RXa to RXn, in addition to a function same as the controlling portion 500 of the conventional base station shown in Figure 29. When a normal communication is carried out between MSi ($i = a, \dots, n$) and the base station, RXi ($i = a, \dots, n$) is a signal whose content indicates that a receiving operation is going on for the signal transmitted from MSi. On the other hand, when a normal communication cannot be maintained between MSi and the base station due to an influence of such as being in shade, so that the base station stops receiving a signal from MSi, RXi is a signal whose content indicates that the receiving operation is not performed for the signal transmitted from MSi.

A structure of the upstream channel transmit power controlling signal generating portion 250 is shown in Figure 26. The upstream channel transmit power controlling signal generating portion 250 comprises transmit power controlling signal generating portions 250a to 250n whose inputs are SIRi, T-SIRi and RXi and whose outputs are TPCi. The added character "i" denotes one of characters "a" to "n". A structure of a transmit power controlling signal generating portion 250i is shown in Figure 27. A comparator 254i

compares SIR_i input through a signal line 230i and $T-SIR_i$ to generate a signal that selects 0 (a signal instructing to decrease the transmit power) in a selector 251i in the case of $SIR_i \geq T-SIR_i$, and a signal that selects 1 (a signal instructing to increase the transmit power) in the selector 251i in the case of $SIR_i < T-SIR_i$. The selector 251i selects 0 or 1 in accordance with an output from the comparator 254i to output it through a signal line 252i to a selector 253i. The selector 253i determines the transmit power controlling signal TPC_i in accordance with the signal RX_i indicating whether a receiving operation is going on or not. An operation of the selector 253i is shown in Figure 28. The selector 253i selects a signal input as the transmit power controlling signal TPC_i through a signal line 252i, when RX_i is a signal indicating that a receiving operation is going on. On the contrary, the selector 253i selects 0 (a signal instructing to decrease the transmit power) as the transmit power controlling signal TPC_i when RX_i is a signal indicating that a receiving operation has been stopped.

The transmit power controlling signals TPC_a to TPC_n for MS_a to MS_n generated in the above method are input through signal lines 231a to 231n into frame forming portions 225a to 225n to take processes similar to the case of the conventional base station before being transmitted from the antenna 210.

A mobile station according to the invention does not

cause an error in controlling the transmit power even in the case of receiving the transmit power controlling signal, which includes an error in receiving. That is, transmission at excessive transmit power due to incorrect control or out-of control can be prevented, so that the number of subscribers contained in a system can be increased, compared with the conventional case. Further, the power supply of a mobile station can be saved since the transmission is not carried out at excessive transmit power.

- 10 According to the radio base station according to the invention, it can be possible to prevent a mobile station from transmitting at excessive transmit power by controlling the mobile station not to transmit an improper transmit power controlling signal after stopping a receiving operation for the signal to be transmitted. Thus, deterioration of the communication quality due to an error in controlling power can be avoided and the subscriber capacity of a whole system can be significantly improved.
- 15

Claim(s)

1 1. A transmit power controlling method in a code
2 division multiple access communication system comprising
3 a radio base station and a mobile station, characterized
4 in that said radio base station transmits a transmit power
5 controlling signal for controlling transmit power of the
6 mobile station, and that said mobile station generates a
7 likelihood of said transmit power controlling signal on the
8 basis of the received transmit power controlling signal and
9 the receiving quality to generate a variation amount of the
10 transmit power on the basis of said likelihood, so that the
11 transmit power of the mobile station would be controlled
12 on the basis of the variation amount.

1 2. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 1, characterized in that said likelihood is generated
4 with a perch receiving quality of a signal transmitted from
5 said radio base station also taken into account.

1 3. The transmit power controlling method in a code
2 division multiple access communication system according to

00786159, 0070071

3 Claim 1, characterized in that the receiving quality of a
4 perch signal transmitted from said radio base station is
5 compared with the receiving quality of a transmit power
6 controlling signal so that it is determined that a call is
7 cut off when only one of the receiving qualities is
8 deteriorated and it is determined that a receiving condition
9 is no longer proper when the both of the receiving qualities
10 are deteriorated, and in that the likelihood is generated
11 on the basis of a result of the determination.

1 4. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 1, characterized in that, when an absolute value of
4 the likelihood of said transmit power controlling signal
5 is large, an upper limit value and a lower limit value of
6 the transmit power of a mobile station are updated and
7 maintained so that the transmit power of said mobile station
8 is limited between said upper limit value and said lower
9 limit value.

1 5. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 1, characterized in that an average value of the
4 transmit power of a mobile station is generated, and that
5 the transmit power of said mobile station is switched on

6 the basis of the size of said likelihood so as to be either
7 said generated average transmit power of the mobile station
8 or transmit power of the mobile station that is generated
9 on the basis of said likelihood.

1 6. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 1, characterized in that open loop transmit power is
4 generated on the basis of the receiving quality or the
5 receiving power of another channel different from a channel
6 being used, and that the transmit power of said mobile
7 station is switched on the basis of the size of said
8 likelihood so as to be said generated open loop transmit
9 power or transmit power of the mobile station that is
10 generated on the basis of said likelihood.

1 7. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 1, characterized in that said transmit power
4 controlling signal is a signal comprising two values, and
5 that said likelihood is calculated so that an absolute value
6 of the likelihood would be large when the receiving quality
7 is good and so that an absolute value of the likelihood would
8 be small when the receiving quality is bad.

1 8. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 7, characterized in that the transmit power is
4 increased when said likelihood is a first reference value
5 or more, that the transmit power is maintained when said
6 likelihood is less than said first reference value and a
7 second reference value or more, and that the transmit power
8 is decreased when said likelihood is less than said second
9 reference value.

1 9. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 7, characterized in that the transmit power is
4 increased when said likelihood is said first reference value
5 or more, that the transmit power is toggle-controlled when
6 said likelihood is less than said first reference value and
7 said second reference value or more, and that the transmit
8 power is decreased when said likelihood is less than said
9 second reference value.

1 10. The transmit power controlling method in a code
2 division multiple access communication system according to
3 Claim 7, characterized in that the transmit power is
4 increased when said likelihood is said first reference value
5 or more, that a variation amount of the transmit power is

6 made to be the power corresponding to said likelihood when
7 said likelihood is less than said first reference value and
8 said second reference value or more, and that the transmit
9 power is decreased when said likelihood is less than said
10 second reference value.

1 11. A transmit power controlling method in a code
2 division multiple access communication system comprising
3 a radio base station and a mobile station, characterized
4 in that said radio base station measures SIR for every said
5 mobile station to compare each of said measured SIRs with
6 a target SIR given in advance, generates a transmit power
7 controlling signal for decreasing the transmit power when
8 said SIR is the target SIR or more or when said radio base
9 station has stopped a receiving operation for said mobile
10 station, generates a transmit power controlling signal for
11 increasing the transmit power when said SIR is less than
12 the target SIR, and transmits said generated transmit power
13 controlling signal to the mobile station.

1 12. A mobile station characterized by comprising:
2 receiving means for receiving transmit power controlling
3 information transmitted by a radio base station; measuring
4 means for measuring the receiving quality of a wave
5 transmitted by said radio base station; likelihood

6 generating means for generating a likelihood of said
7 transmit power controlling information on the basis of the
8 transmit power controlling information received by said
9 receiving means and the receiving quality measured by said
10 measuring means; variation amount generating means for
11 generating a variation amount of the transmit power on the
12 basis of the likelihood generated by said likelihood
13 generating means; and controlling means for controlling the
14 transmit power of a mobile station on the basis of the
15 variation amount generated by said variation amount
16 generating means.

1 13. The mobile radio station according to Claim 12,
2 characterized by further comprising perch receiving quality
3 measuring means for measuring the receiving quality of a
4 perch signal transmitted by said radio base station, wherein
5 said likelihood generating means generates a likelihood
6 with the receiving quality measured by said perch receiving
7 quality measuring means taken into a consideration.

1 14. A code division multiple access communication
2 system comprising a radio base station and a mobile station,
3 characterized in that
4 said radio base station comprises: transmit power
5 controlling information generating means for generating

6 transmit power controlling information for controlling the
7 transmit power of a mobile station; and transmitting means
8 for transmitting the transmit power controlling information
9 generated by said transmit power controlling information
10 generating means, and that

11 said mobile station comprises: receiving means for
12 receiving the transmit power controlling information
13 transmitted by said transmitting means; measuring means for
14 measuring the receiving quality of a wave transmitted by
15 said radio base station; likelihood generating means for
16 generating a likelihood of said transmit power controlling
17 information on the basis of the transmit power controlling
18 information received by said receiving means and of the
19 receiving quality measured by said measuring means;
20 variation amount generating means for generating a
21 variation amount of the transmit power on the basis of the
22 likelihood generated by said likelihood generating means;
23 and controlling means for controlling the transmit power
24 of a mobile station on the basis of the variation amount
25 generated by said variation amount generating means.

1 15. A radio base station controlling transmit power
2 of a mobile station characterized by comprising:
3 signal quality measuring means for measuring signal
4 quality of said mobile station;

5 comparing means for comparing the signal quality
6 measured by said signal quality measuring means with a
7 predetermined value;

8 generating means for generating, as a result of
9 comparison in said comparing means, transmit power
10 controlling information for decreasing said transmit power
11 when said signal quality is said predetermined value or more
12 and for generating transmit power controlling information
13 for increasing said transmit power when said signal quality
14 is less than said predetermined value; and

15 transmitting means for transmitting to said mobile
16 station the transmit power controlling signal generated by
17 said generating means.

1 16. The radio base station according to Claim 15,
2 characterized in that said signal quality is SIR.

1 17. A radio base station controlling transmit power
2 of a mobile station characterized by comprising:

3 receiving means for receiving a channel transmitted
4 by said mobile station;

5 controlling means for controlling a receiving
6 operation of said receiving means;

7 generating means for generating instructing
8 information for giving an instruction to decrease the

9 transmit power of said mobile station at the time when said
10 controlling means stops the receiving operation of said
11 receiving means; and
12 transmitting means for transmitting to said mobile
13 station the instructing information generated by said
14 generating means.

1 18. A radio base station controlling transmit power
2 of a mobile station characterized by comprising:
3 receiving means for receiving a channel transmitted
4 by said mobile station;
5 controlling means for controlling a receiving
6 operation of said receiving means;
7 generating means for generating instructing
8 information for giving an instruction to decrease the
9 transmit power of said mobile station when said controlling
10 means tries to stop the receiving operation of said
11 receiving means; and
12 transmitting means for transmitting to said mobile
13 station the instructing information generated by said
14 generating means before said receiving operation is
15 stopped.

09/786459

ABSTRACT

The present invention provides a transmit power controlling method for reducing an influence of incorrect control in a mobile communication system in the CDMA mode.

- 5 A likelihood of transmit power controlling signal is generated on the basis of the transmit power controlling signal transmitted by a radio base station and the receiving quality, a variation amount of the transmit power is generated on the basis of the likelihood, and the transmit
- 10 power of a mobile station is controlled on the basis of the variation amount.

FIG.1

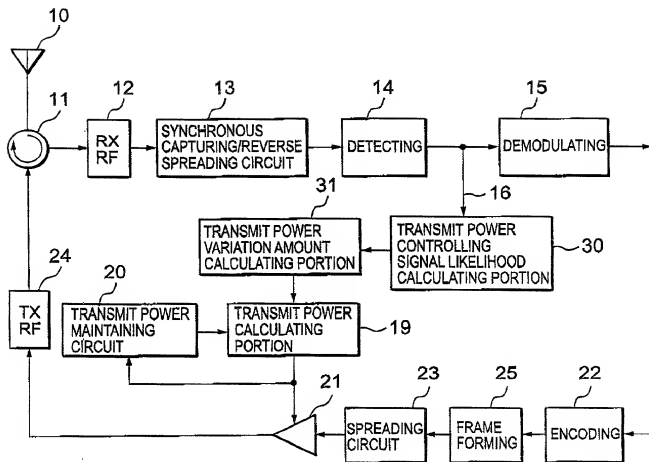


FIG.2

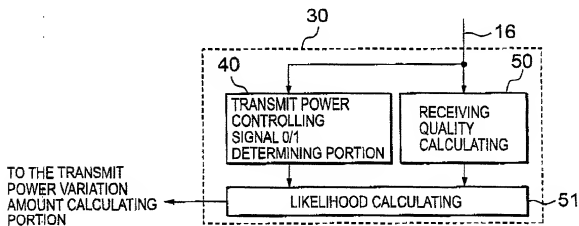


FIG.3

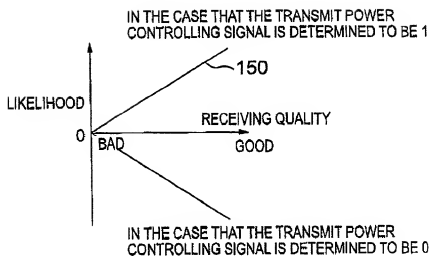


FIG.4

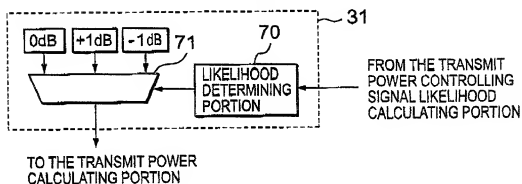


FIG.5

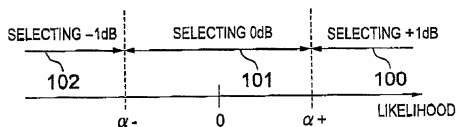


FIG.6

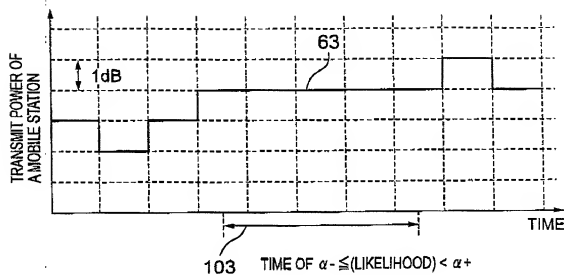


FIG.7

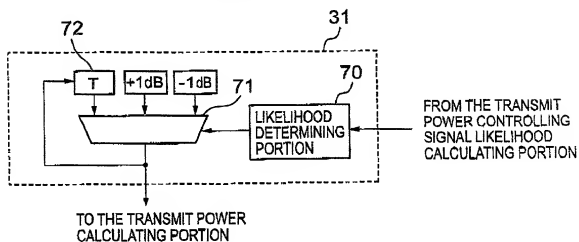


FIG.8

INPUT	OUTPUT
+1dB	-1dB
-1dB	+1dB

FIG.9

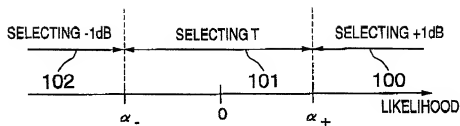


FIG.10

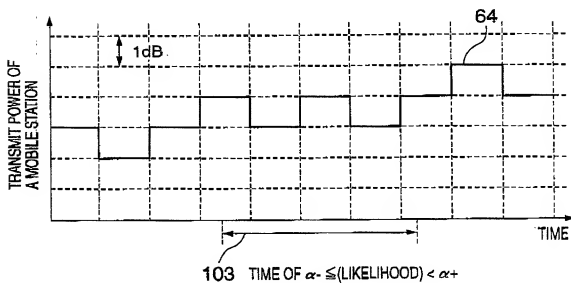


FIG.11

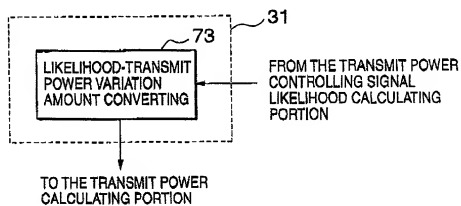


FIG. 12

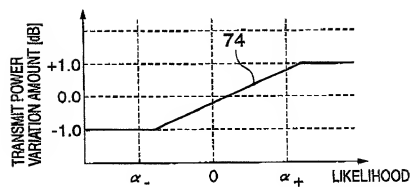


FIG. 13

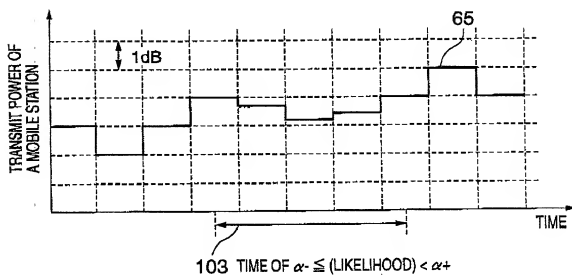


FIG. 14

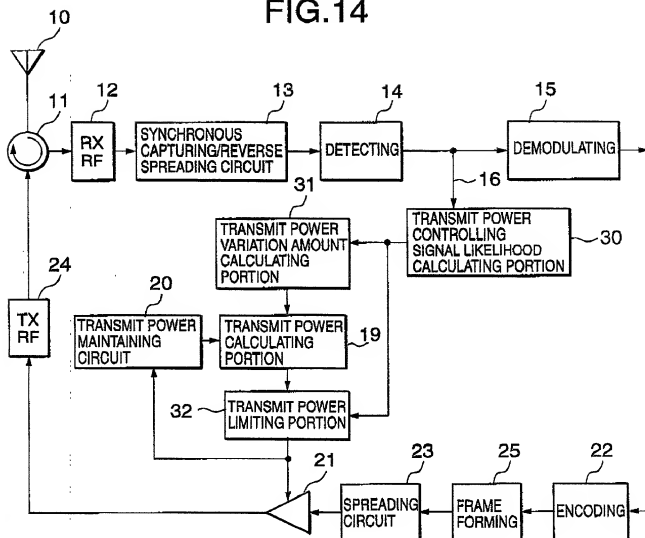


FIG. 15

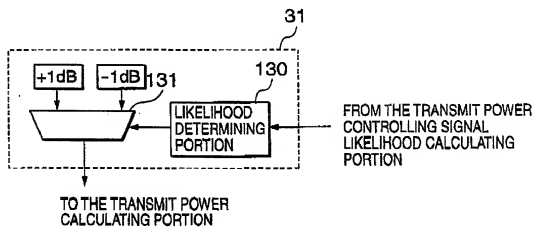


FIG.16




FIG.17

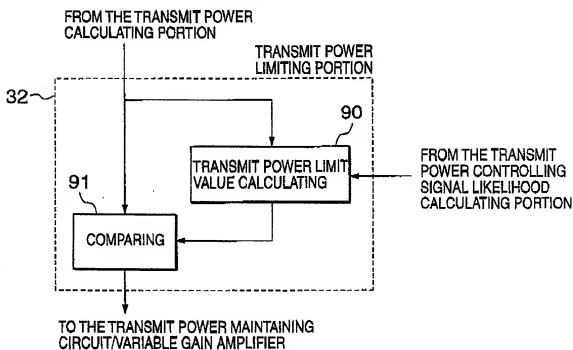


FIG.18




FIG.19

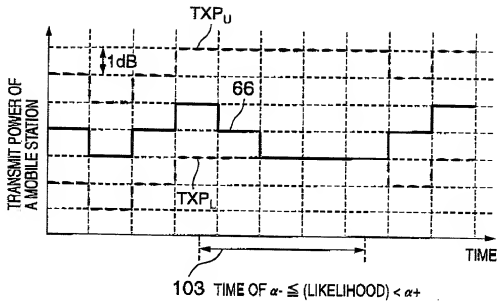


FIG.20

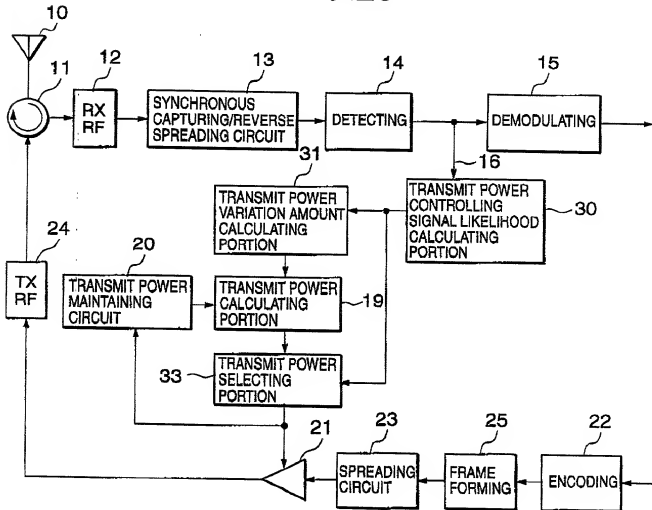


FIG.21

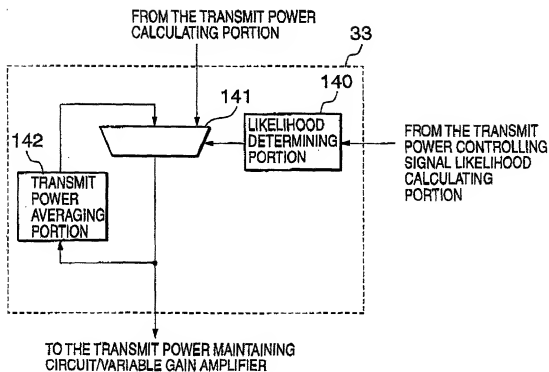


FIG.22

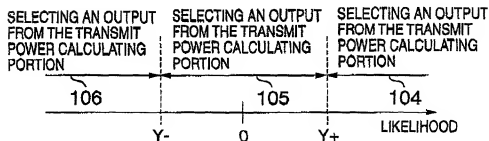


FIG.23

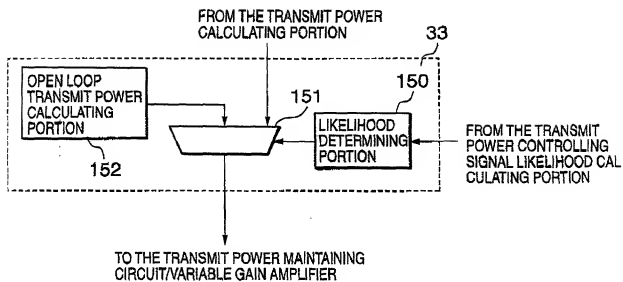


FIG.24

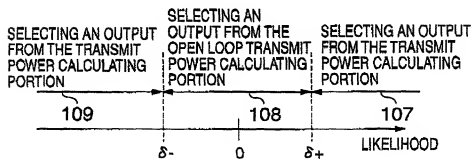


FIG.25

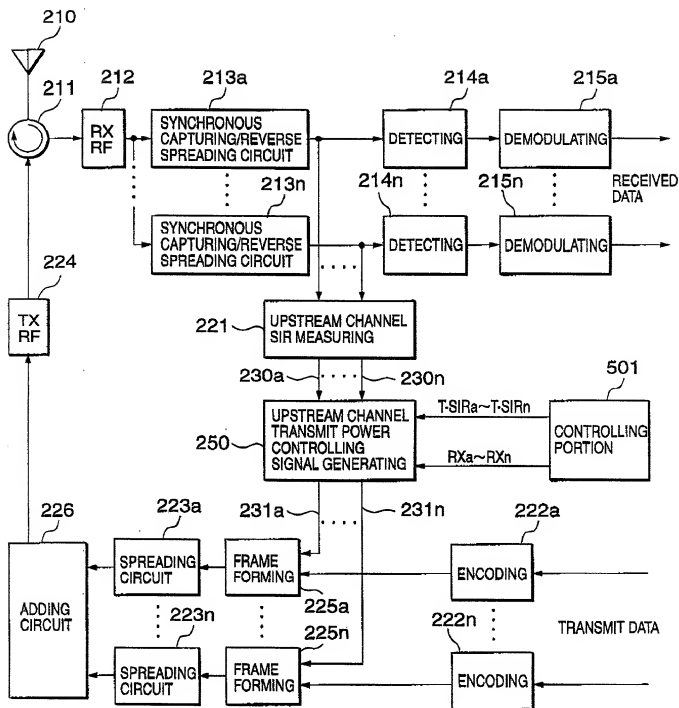


FIG.26

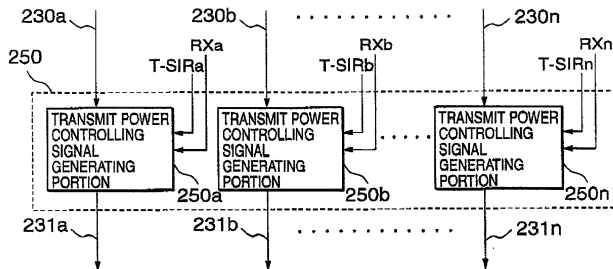


FIG.27

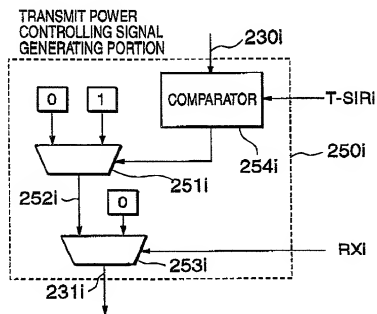


FIG.28

RXi	OPERATION
IN A RECEIVING OPERATION	SELECTING 252i
IN SUSPENSION OF A RECEIVING OPERATION	SELECTING 0

FIG.29

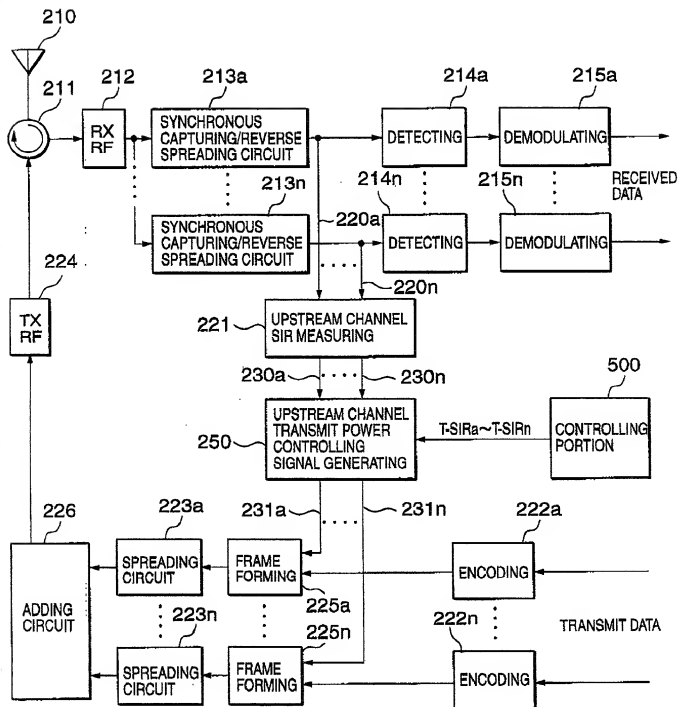


FIG.30

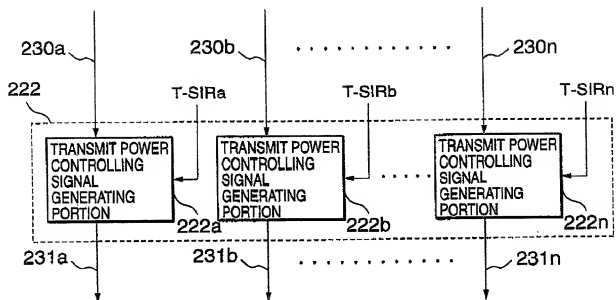


FIG.31

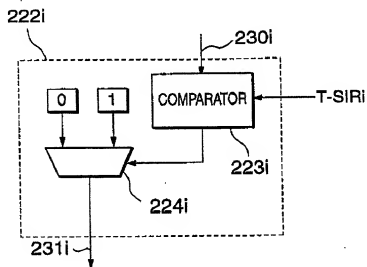


FIG.32

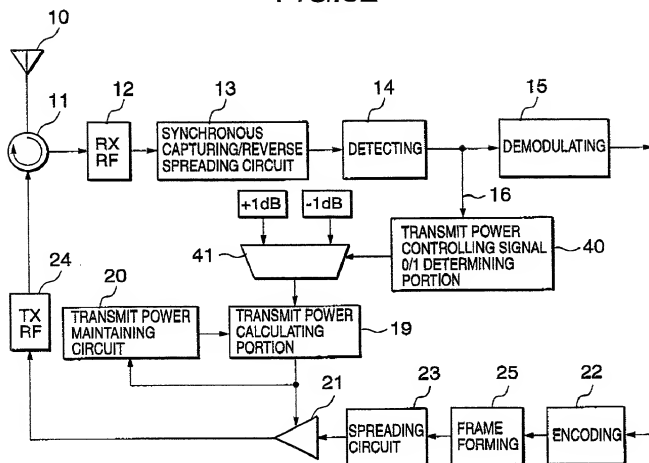


FIG.33

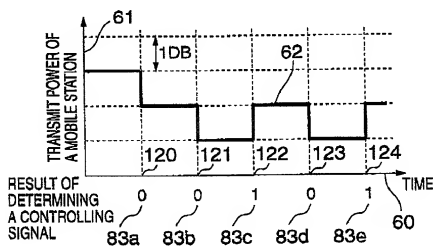


FIG.34


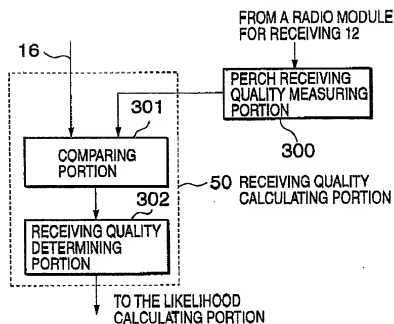


FIG.35

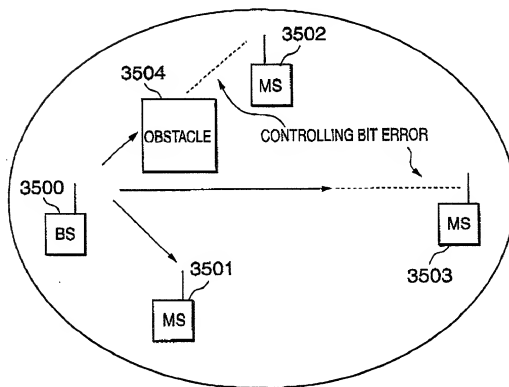

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD FOR CONTROLLING TRANSMIT

POWER IN A COMMUNICATION SYSTEM

上記発明の明細書（下記の欄で印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 年 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☒ was filed on December 21, 1999
as United States Application Number or PCT
International Application Number
PCT/JP99/07174 and was amended on
(if applicable)

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき、下記の、米国以外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している本出願の前に出願された特許又は発明者証の外国出願を、以下に、枠内をマサすることで、示しています。

Prior foreign application(s)
外国での先行出願

10-362871
(Number)
(番号)

Japan
(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私は第35編米国法典119条(e)項に基づいて、下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編第120条に基づいて、下記の特許出願に記載された権利、又は米国を指定している特許協力条約365(a)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編第112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されない限り、その先行米国出願書提出日以降で本出願書の日本国内又は特許協力条約国際出願提出日まで期間中に入手された、連邦規則法典第37編第1条第56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行う表明が真実であり、かつ私の入手した情報と私の信ずるところに基づき表明がすべて真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365 (b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
優先権主張なし

21/December/1998
(Day/Month/Year Filed)
(出願年月日)

☐

(Day/Month/Year Filed)
(出願年月日)

☐

(Day/Month/Year Filed)
(出願年月日)

☐

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status)(patented, pending, abandoned)
(現況：特許許可済、係属中、放棄済)

(Status)(patented, pending, abandoned)
(現況：特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

委任状: 私は、下記の発明者として、本出願に関する一切の手続を米国特許商標局に対して遂行する弁理士又は代理人として、下記のことを指名致します。(弁理士、又は代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,082; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621

書類送付先:

Send Correspondence to:

Antonelli, Terry, Stout & Kraus, LLP

Suite 1800

1300 North Seventeenth Street

Arlington, Virginia 22209

直通電話連絡先: (名称及び電話番号)

Direct Telephone Calls to:

Telephone: (703) 312-6600

Fax: (703) 312-6666

唯一又は第一発明者名	1-00	Full name of sole or first inventor Katsuhiko TSUNEHARA
発明者の署名	日付	Inventor's signature Katsuhiko Tanehara Date 7/19/2001
住所		Residence Kokubunji, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan
第二共同発明者名 (該当する場合)	2-00	Full name of second joint inventor, if any Takashi YANO
第二発明者の署名	日付	Second inventor's signature Takashi Yano Date 7/19/2001
住所		Residence Kokubunji, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan

(第三以降の共同発明者についても同様に記載し、署名をすること。)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者名 (該当する場合) 300		Full name of third joint inventor, if any <u>Takaki UTA</u>	
第三発明者の署名	日付	Third inventor's signature <u>Takaki Uta</u>	Date <u>7/23/2001</u>
住所		Residence <u>Kokubunji, Japan JPX</u>	
国籍 日本		Citizenship Japanese	
郵便の宛先		Post office address c/o Hitachi, Ltd., Intellectual Property Group 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第四共同発明者名 (該当する場合) 400		Full name of fourth joint inventor, if any <u>Toshiro SUZUKI</u>	
第四発明者の署名	日付	Fourth inventor's signature <u>Toshiro Suzuki</u>	Date <u>7/26/2001</u>
住所		Residence <u>Yokohama, Japan JPX</u>	
国籍		Citizenship Japanese	
郵便の宛先		Post office address c/o Hitachi, Ltd., Intellectual Property Group 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第五共同発明者名 (該当する場合) 500		Full name of fifth joint inventor, if any <u>Toshinori SUZUKI</u>	
第五発明者の署名	日付	Fifth inventor's signature <u>Toshinori Suzuki</u>	Date <u>7/27/2001</u>
住所		Residence <u>Tokyo, Japan JPX</u>	
国籍		Citizenship Japanese	
郵便の宛先		Post office address c/o KDDI Corporation 3-2 Nishishinjuku 2-chome, Shinjuku-ku, Tokyo 163-8003 Japan	
第六共同発明者名 (該当する場合)		Full name of sixth joint inventor, if any	
第六発明者の署名	日付	Sixth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post office address	

United States Patent & Trademark Office
Office of Initial Patent Examination — Scanning Division



Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

- ☐ *Scanned copy is best available.* Specification are
having the black line on all pages.

09786459.091001